

### Automobiles



### Pharma



### Oil & Gas



## Features

- 15" TFT LCD display with 1024 × 768 Resolution, 200 cd/m<sup>2</sup> Brightness, and 1300:1 Contrast ratio.
- Capacitive touch screen for smooth and precise user interaction.
- 12VDC Power Input, 36W Consumption with HDMI, DP, and VGA video ports.
- USB 2.0 Type-A rear I/O for connectivity.
- Durable mild steel Enclosure, Dimensions 364(W) × 284(H) × 51(D) mm, net weight 3.3 kg, supports wall and VESA mounting.
- Wide viewing angle: 88° × 88° × 88° × 88°.
- Backlight life up to 70,000 hours for long-term reliability.
- OS support: Windows 7 and Windows 10.



# Specifications

## Display

Port	HDMI, DP and VGA
USB	Rear I/O USB 2.0 type A
Display Type	TFT LCD
Display Size	15 inch
Resolution	XGA (1024 x 768 pixels)
Max. Color	16.2M/262k
Viewing Angle (H/V)°	88° x 88° x 88° x 88°
Luminance (cd/m2)	200
Backlight Life (hrs)	70K
Contrast Ratio	1300:1
Interface	LVDS

## Environment

Operating Temp.	-20° C to +70° C
Storage Temp.	-30° C to +70° C
Humidity	RH 90%
RoHS Compliance	RoHS Complied
Vibration (Non-Operating)	1.5G, 10~300Hz sine wave, 10min/cycle, 3 cycles each X, Y, Z direction

## System

OS Support	Windows 7 and 10
------------	------------------

## Touchscreen

Touchscreen Type	Capacitive Touch
------------------	------------------


## Power

Power Input	12VDC, 36W
-------------	------------

## Mechanical

Dimensions (W x H x D)	364mm x 284mm x 51mm
Weight	3.3Kg
Mounting	Wall and Vesa Mounting
Enclosure	Mild Steel

# Dimensions & Drawing

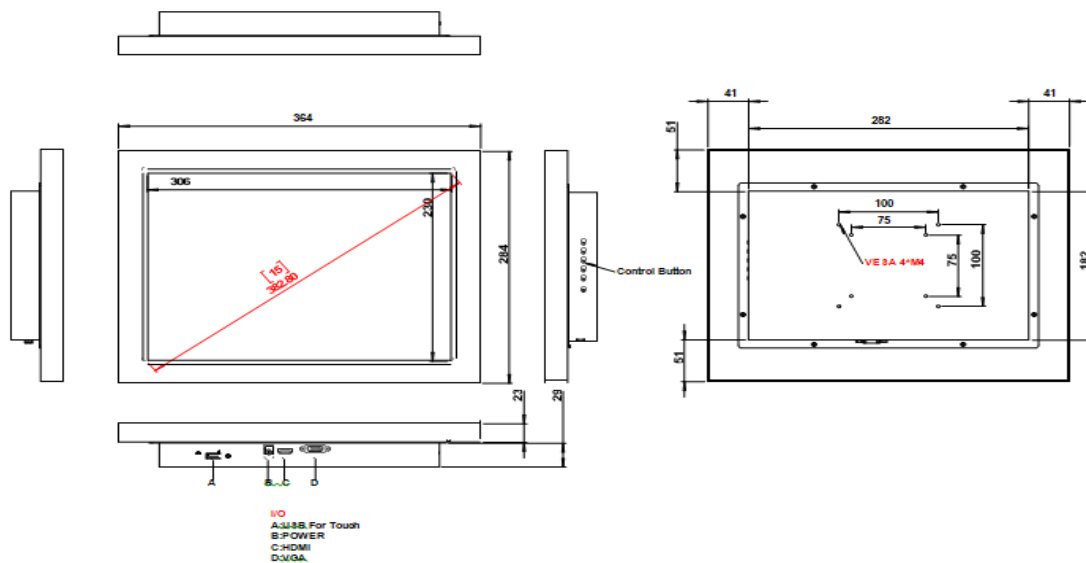

# Order Information

Part No.	Description
AT-8-15CT	15" Industrial TFT LED Display with touch